


Waveguide Iso-Adapter, WR42, 18.0-26.5GHz UG595/U Flange, SMA Female Connector, 1 Watt

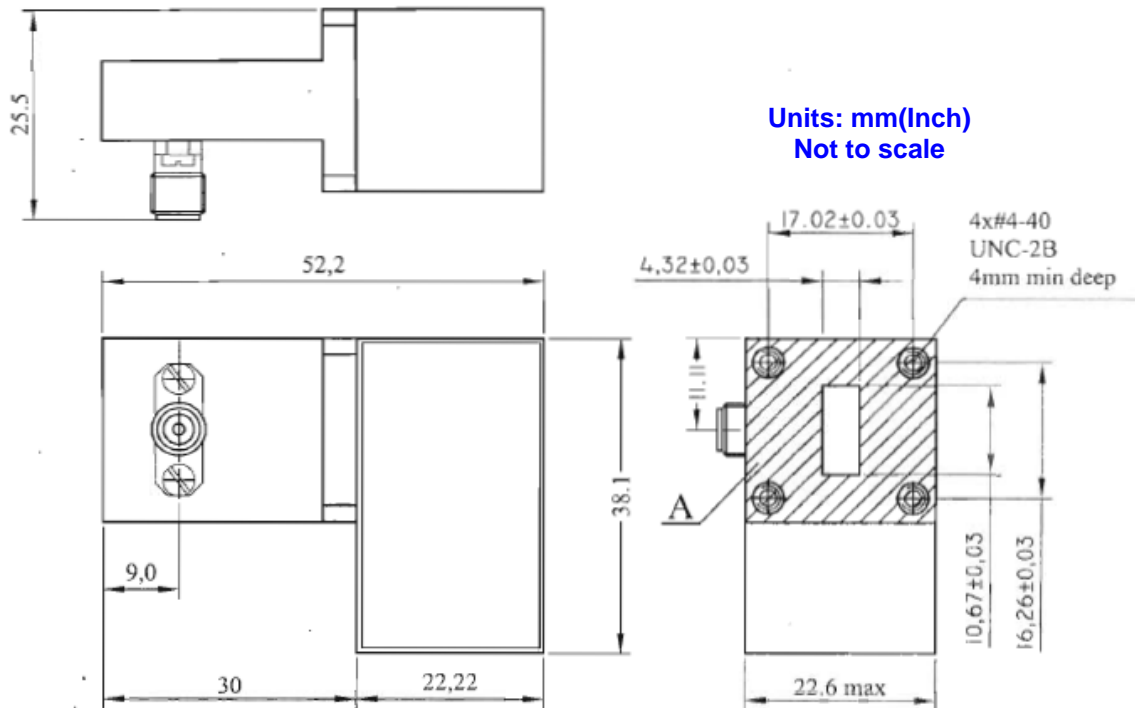

Order Examples: RADIA-18-26.5-WR42(UG595U)-SMAf-1W-e

Description: (Iso Adapter, 18-26.5 GHz, WR42 Waveguide, UG595/U Flange, SMA Female Connector, 1 Watt)

Specifications	Units	
Frequency	18.0-26.5	GHz
Insertion loss	0.7	dB max.
Isolation	18	dB min.
VSWR	1.25:1	
Power Forward	2	Watt
Power Load	1	Watt
Temperature Range	+15 to 35	°C
Waveguide input	WR42	
Coax output	SMA Female	